




IRON MASTER IRON REMOVAL SYSTEM with 762 TIMER

Removes both Ferric and Ferrous iron while providing economical, luxurious soft water.

Featuring :

- Demand regeneration system.
- Autotrol 268 control valve with Logix Series 762 timer.
- Fully programmable cycle times.
- Variable or fixed reserve options
- Bypass with 3/4" or 1" copper or pvc tube adapters and optional 90 degree elbow
- 18" x 33" Polyethelene brine tank with brine safety and brine well.
- Moisture proof jacket on 32,000 grain unit
- High quality, high capacity fine mesh resin

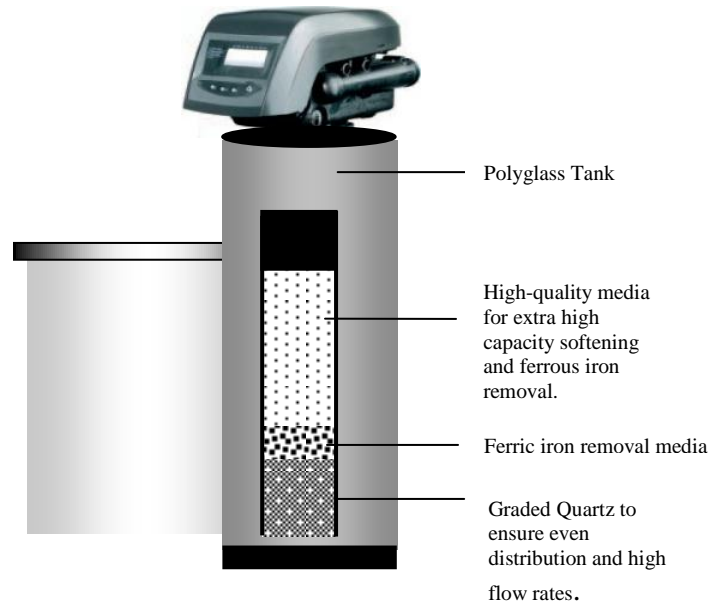

Nature Soft Models	A268IM-32MJB-762	A268IM-48MB-762	A268IM-64MB-762
Grains capacity per regeneration	32,000 gr	48,000 gr	64,000 gr
Cu. Ft. capacity fine mesh ion exchange resin	1.0 cu. ft.	1.5 cu. ft.	2.0 cu. ft.
Iron Removal capacity*	4 PPM	4 PPM	4 PPM
Mineral Tank Size	10x54	12x52	13x54
Service flow rate	6 GPM	8 GPM	10 GPM
Space Required (D"xW"xH")	18"x28"x61"	18"x30"x61"	18"x32"x62"

**Iron removal capacity is dependent on Ph and mineral content of water, accurate water testing is essential.*