


PRODUCT SUMMARY

STENNER PUMPS

CLASSIC SERIES

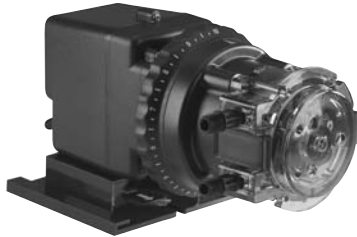

- Single or double head pump with adjustable or fixed output
- Mechanical control adjustable from 5%-100% in 2.5% increments
- Outputs @ 60Hz
 - Up to 25 psi (1.7 bar)
0.2-170.0 gpd (0.8-643.5 lpd)
 - Up to 100 psi (6.9 bar)
0.2-40.0 gpd (0.8-151.4 lpd)

SVP SERIES





- Variable speed with manual adjustment or with both 4-20mA input and manual control
- 20:1 turndown, 1% increments non-scalable
- Outputs @ 50/60Hz
 - Up to 25 psi (1.7 bar)
0.3-85.0 gpd (1.1-321.8 lpd)
 - Up to 100 psi (6.9 bar)
0.3-40.0 gpd (1.1-151.4 lpd)

BDF SERIES



- Programmable 7-day or 24-hour timer with dip switches
- Manual priming button
- Outputs @ 60Hz
 - Up to 25 psi (1.7 bar)
0.06-21.0 oz per event
 - Up to 100 psi (6.9 bar)
0.06-4.5 oz per event

M128 SERIES PUMP AND SYSTEM

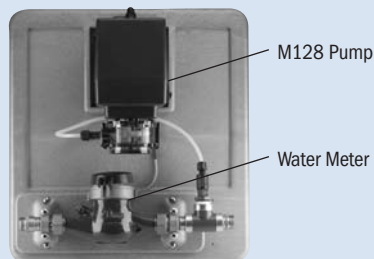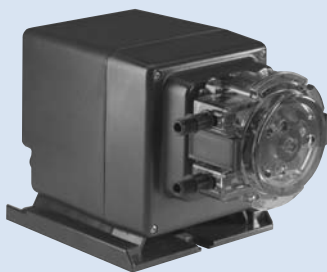


The M128 pump treats livestock water with sanitizers, disinfectants, nutrients and medications at a fixed rate of one ounce per gallon and is actuated by water flow from a signal from a dry contacting water meter.

- The M128 system is shipped with the pump and corresponding meter mounted on a panel

Model	Maximum Pressure	Max. Output @ 50/60Hz		Max. System Water Flow for 1:128 Dosing	
		oz/min	ml/min	gal/min	L/min
M05	25 psi (1.7 bar)	8.4	249.7	8.4	31.8
M07	100 psi (6.9 bar)	3.5	105.1	3.5	13.2


NOTE: To inject at a ratio of 1:128 at flow rates higher than 3.5 gpm up to 100 psi, the injection point can be installed after a pressure regulator. This will allow flow rates up to 8.4 gpm up to 25 psi. Contact factory for assistance with sizing.

QuickPro™ PUMP HEAD

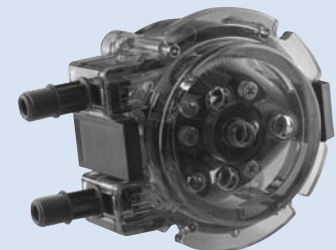

- Shipped with new pumps; retro-fits existing models
- Latches replace screws
- Roller assembly collapses and expands for tube replacement
- Brand new easy tube change

PROPORTIONAL INJECTION SYSTEM

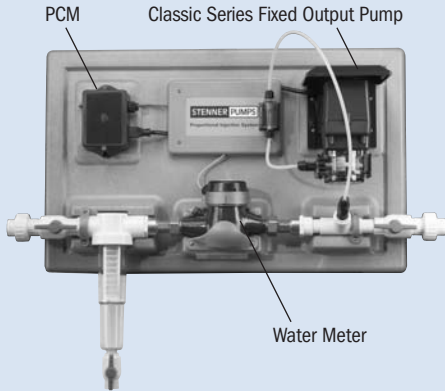

The Proportional Injection System delivers precise dosing proportional to the system's flow rate based on water volume. The system is shipped pre-assembled on a panel for quick installation.

Dual System also available with two Pumps and two PCMs.

- Panel and wall mount brackets included
- Cabinet keeps cords and wires contained and accessible
- Only available as 120V with 3/4" bronze meter
- Accommodates 3/4" or 1" piping

PUMP CONTROL MODULE

The PCM is a time adjustable controller that powers the pump via a signal from a dry contacting water meter.

- PCM 1: 0.1-1.0 second
- PCM 5: 0.5-5.0 seconds
- PCM 10: 1.0-10.0 seconds
- PCM 20: 2.0-20.0 seconds



WATER METER

- Reed switch
- Dry contact closure
- Plastic: 3/4", 1" (Proportional Feed Installation) & Certified with WQA under NSF/ANSI-372 (low lead)
- Bronze: 3/4" (Proportional Injection System), 1", 1 1/2", 2"



STS SERIES



The STS series is available in white or UV gray.

The Stenner Tank System is shipped pre-assembled from the factory to help reduce installation time. The pump is mounted vertically for spill containment.

- 7.5, 15 or 30 gallon
- 45 or 85 Classic series pump included
- Locking, child resistant lid
- Tanks sold separately for Classic 45 & 85, BDF, SVP pumps

FLOW INDICATOR

Convenient visual reference to confirm solution is pumping in the system.

- Includes bracket
- Weather and UV resistant body
- Simple installation



PUMP COVER



The Pump Cover provides additional protection from rain and is used with the rain roof. It is only for pumps that run intermittently.

This information is not intended for specific application purposes. Stenner Pump Company reserves the right to make changes to prices, products, and specifications at any time without prior notice.

FPSUM Rev0412



Stenner Pump Company
3174 DeSalvo Road
Jacksonville, Florida 32246

Phone 904.641.1666
US Toll Free 800.683.2378
Fax 904.642.1012

www.stenner.com
sales@stenner.com
© Stenner Pump Company All Rights Reserved